


Tension-Clamp Ultra-Slim Signal Conditioners M6S Series

DC ALARM

(PC programmable)

Functions & Features

- Maintenance-free tension clamp connection
- 5.9-mm wide ultra-slim design
- Low profile allows the M6S module mounted in a 120-mm deep panel
- Provides a relay contact output at preset DC input levels
- PC programmable
- High-density mounting
- Power and status indicator LEDs

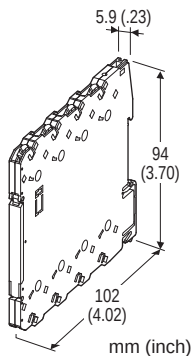

MODEL: M6SXAS-[1]-R[2]

ORDERING INFORMATION

- Code number: M6SXAS-[1]-R[2]
Specify a code from below for each [1] and [2].
(e.g. M6SXAS-Z1-R/Q)
- Input range (e.g. 4 - 20 mA DC)
- Specify the specification for option code /Q
(e.g. /SET)

[1] INPUT

Current

Z1: Range 0 - 50 mA DC (Input resistance 24.9 Ω)

Voltage

S1: Range -1000 - +1000 mV DC (Input resistance 1 M Ω min.)

S2: Range -10 - +10 V DC (Input resistance 1 M Ω min.)

(Configurator software is used to change input over the described range of the selected suffix code.

For changing between suffix codes, set the Input Range Selector on the side of unit before software adjustment.)

OUTPUT

Relay; SPDT or transfer contact

POWER INPUT

DC Power

R: 24 V DC

(Operational voltage range 24 V $\pm$ 10 %, ripple 10 %p-p max.)

[2] OPTIONS

/Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q

EX-FACTORY SETTING

/SET: Preset according to the Ordering Information Sheet
(No. ESU-7828)

RELATED PRODUCTS

- PC configurator software (model: M6CFG)

Downloadable at M-System's web site.

A dedicated cable is required to connect the module to the PC. Please refer to the internet software download site or the users manual for the PC configurator for applicable cable types.

GENERAL SPECIFICATIONS

Connection

Input and output: Tension clamp

Power input: Via the Installation Base (model: M6SBS)
or Tension clamp

Applicable wire size: 0.2 to 2.5 mm², stripped length 8 mm

Housing material: Flame-resistant resin (black)

Isolation: Input to output to power

Power LED: Green light turns on when the power is supplied.

Status indicator LED: Orange LED; Blinking patterns indicate different operating status of the transmitter.

Alarm monitor LED: Red LED turns on when the alarm is tripped.

Programming: Downloaded from PC

Input type and range

Input fine adjustments

Alarm setpoint (input %)

Trip action (High or Low)

Relay coil (energized or de-energized)

Power ON delay time (0 to 999 sec.)

Alarm ON delay time (0 to 999 sec.)

Hysteresis (deadband) (input %)

Alarm test, and others

For detailed information, refer to the users manual for the PC configurator.

Configurator connection: 2.5 dia. miniature jack;

RS-232-C level

Factory default setting

Alarm setpoint: 80 %



幸託有限公司
XIN TOP CORPORATION

TEL : (02)2598-1199
FAX : (02)2596-2331

E-mail : info@xintop.com
Website : www.xintop.com

Trip action: High
 Relay coil at alarm: Energized
 Power ON delay time: 5 sec.
 Alarm ON delay time: 0 sec.
 Hysteresis (deadband) : 1.0 %

Weight: 65 g (2.3 oz)

INPUT SPECIFICATIONS

■ **DC Current:** Input resistor incorporated
 (If not specified, the input range is 4 – 20 mA DC.)
Input range: 0 – 50 mA DC
Minimum span: 2 mA
Offset: Lower range can be any specific value within the input range provided that the minimum span is maintained.

■ **DC Voltage**
 • **Code S1 (narrow spans)**
Input range: -1000 – +1000 mV DC
Minimum span: 100 mV
 • **Code S2 (wide spans)**
Input range: -10 – +10 V DC
Minimum span: 1 V
Offset: Lower range can be any specific value within the input range provided that the minimum span is maintained.
 If not specified, the input range is shown below.
 S1: 0 – 100 mV DC
 S2: 1 – 5 V DC

PERFORMANCE in percentage of span

Setpoint accuracy (trip point accuracy) : $\pm 0.05 \%$
 Setpoint accuracy is inversely proportional to the input span.
 [Example] Input type 0 – 50 mA, Input range 4 – 20 mA
 $\text{Max. Input Range (50 mA) / Span (16 mA)} \times 0.05 \%$
 $= \pm 0.16 \%$
Temp. coefficient: $\pm 0.01 \%/^{\circ}\text{C}$ ($\pm 0.006 \%/^{\circ}\text{F}$) of max. span
Response time: ≤ 0.2 sec. (0 – 100 % at 90 % setpoint)
Line voltage effect: $\pm 0.1 \%$ over voltage range
Insulation resistance: $\geq 100 \text{ M}\Omega$ with 500 V DC
Dielectric strength: 2000 V AC @1 minute (input to output to power to ground)

STANDARDS & APPROVALS

CE conformity:
 EMC Directive (2004/108/EC)
 EMI EN 61000-6-4: 2007
 EMS EN 61000-6-2: 2005
 Low Voltage Directive (2006/95/EC)
 EN 61010-1: 2001
 Overvoltage Category II
 Pollution Degree 2
 Max. operating voltage 250 V (relay output circuit)
 Input or power to output: Reinforced insulation
 Input to power: Basic insulation


OUTPUT SPECIFICATIONS

■ **Relay Output**
Relay rating:
 250 V AC @2 A ($\cos \phi = 1$)
 30 V DC @2 A (resistive load)
Maximum switching voltage: 250 V AC or 125 V DC
Maximum switching power: 500 VA or 60 W
Minimum load: 5 V DC @100 mA
Mechanical life: 5×10^6 cycles (rate 180/min.)

Alarm Trip Operation Terminal No. in parentheses

• **Setting Example**

Hi alarm (coil energized at alarm) or
 Lo alarm (coil de-energized at alarm)

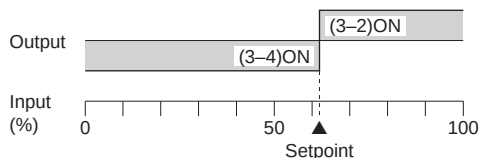

Trip operation in power failure: Terminals 3 – 4 turn ON.

INSTALLATION

Power consumption: Approx. 0.5 W
Operating temperature: -20 to +55°C (-4 to +131°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Mounting: Installation Base (model: M6SBS) or DIN rail




幸託有限公司
 XIN TOP CORPORATION

TEL : (02)2598-1199
 FAX : (02)2596-2331


E-mail : info@xintop.com
 Website : www.xintop.com

EXTERNAL VIEW

■ FRONT VIEW (with the cover open)

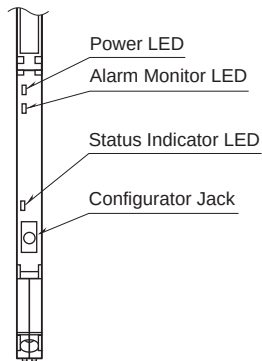


■ SIDE VIEW

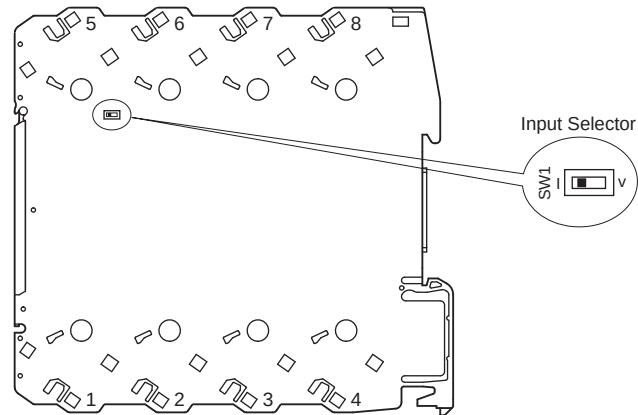

The DIP switch setting is required to select input types before setting a precise input range using PC Configurator Software (model: M6CFG).
Refer to the instruction manual for detailed procedures.


DIMENSIONS unit: mm (inch)

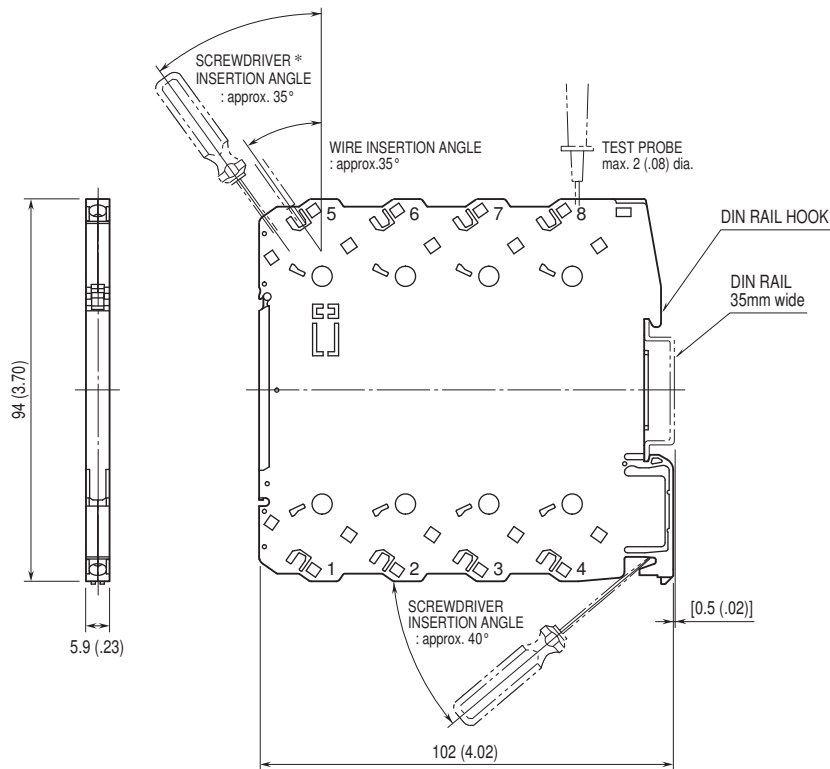


• When mounting, no extra space is needed between units.

*Use a minus screwdriver: tip width 3.8 mm max., tip thickness 0.5 to 0.6 mm


SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

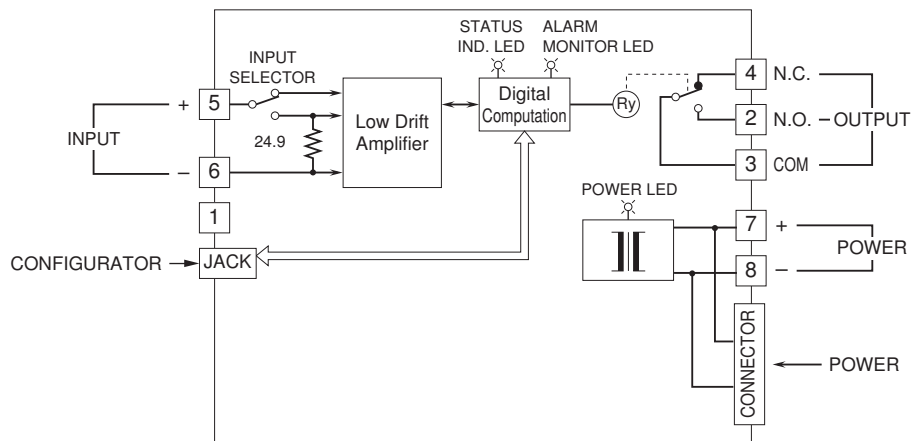

Relay Protection • AC Powered



• DC Powered



Specifications are subject to change without notice.