


Euro Terminal Ultra-Slim Signal Conditioners M6D Series

FREQUENCY TRANSMITTER

Functions & Features

- 5.9-mm wide ultra-slim design
- Low profile allows the M6D module mounted in a 120-mm deep panel
- Converts the output from a pulse-type transducer into a standard process signal
- High-density mounting
- Power indicator LED
- UL approval

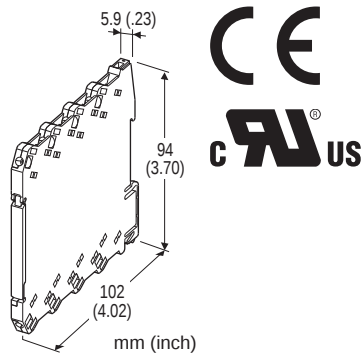

MODEL: M6DPA-[1][2]-R[3]

ORDERING INFORMATION

- Code number: M6DPA-[1][2]-R[3]
Specify a code from below for each [1] through [3].
(e.g. M6DPA-CA-R/UL)
- Frequency range (e.g. 0 - 1 kHz)
- Special output range (For codes Z & 0)

[1] INPUT

- A1: Open collector
A2: Mechanical contact
C: 5 V pulse (sensitivity 2 V)
D: 24 V pulse (sensitivity 10 V)

[2] OUTPUT

Current

- A: 4 - 20 mA DC (Load resistance 550 Ω max.)
Z: Specify current (See OUTPUT SPECIFICATIONS)

Voltage

- 4: 0 - 10 V DC (Load resistance 10 k Ω min.)
5: 0 - 5 V DC (Load resistance 5000 Ω min.)
6: 1 - 5 V DC (Load resistance 5000 Ω min.)
4W: -10 - +10 V DC (Load resistance 20 k Ω min.)

- 5W: -5 - +5 V DC (Load resistance 10 k Ω min.)
0: Specify voltage (See OUTPUT SPECIFICATIONS)

POWER INPUT

DC Power

- R: 24 V DC
(Operational voltage range 24 V $\pm$ 10 %, ripple 10 %p-p max.)

[3] OPTIONS

STANDARDS & APPROVALS

- blank: CE marking
/UL: UL approval (CE marking)

GENERAL SPECIFICATIONS

Connection

- Input and output:** Euro terminal (torque 0.3 N·m)
Power input: Via the Installation Base (model: M6DBS)
or Euro terminal (torque 0.3 N·m)
Applicable wire size: 0.2 to 2.5 mm²
Housing material: Flame-resistant resin (black)
Isolation: Input to output to power
Zero adjustment: -2 to +2 % (front)
(Output code 4W, 5W: Adjustable at 0V.)
Span adjustment: 98 to 102 % (front)
Chattering protection: Filter provided for mechanical contact input
Power LED: Green light turns on when the power is supplied.

INPUT SPECIFICATIONS

- **Open Collector**
Frequency range: 0 - 0.01 Hz through 100 kHz
Pulse width time requirement: $\geq$ 4 μ sec. for both H and L levels
Sensing voltage/current: 2.5 V DC @1 mA (approx.)
Detecting levels: $\leq$ 750 Ω for ON; $\geq$ 3 k Ω for OFF
- **Mechanical Contact**
Frequency range: 0 - 0.01 Hz through 30 Hz
Pulse width time requirement: $\geq$ 10 msec. for both ON and OFF
Sensing voltage/current: 2.5 V DC @1 mA (approx.)
Detecting levels: $\leq$ 750 Ω for ON; $\geq$ 3 k Ω for OFF
- **Voltage Pulse**
Frequency range: 0 - 0.01 Hz through 100 kHz
Pulse width time requirement: $\geq$ 4 μ sec. for both H and L levels
Waveform: Square or sine
Input impedance: $\geq$ 10 k Ω
Max. voltage between input terminals: $\pm$ 50 V
Detecting H level
5 V pulse: $\geq$ 3 V

24 V pulse: ≥ 14 V

Detecting L level

5 V pulse: ≤ 1 V

24 V pulse: ≤ 6 V

OUTPUT SPECIFICATIONS

- **DC Current:** 2 – 20 mA DC (and 0 – 1 mA DC)

Minimum span: 1 mA

Offset: Max. 1.5 times span

Load resistance: Output drive 11 V max.

- **DC Voltage:** 0 – 10 V DC

Minimum span: 1 V

Offset: Max. 1.5 times span

Load resistance: Output drive 1 mA max.; at ≥ 1 V

INSTALLATION

Power consumption: Approx. 0.5 W

Operating temperature: -20 to +55°C (-4 to +131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Installation Base (model: M6DBS) or DIN rail

Weight: 60 g (2.1 oz)

PERFORMANCE in percentage of span

Accuracy: ± 0.1 %

Temp. coefficient: ± 0.015 %/°C (± 0.008 %/°F)

Response time: Max. 0.5 sec. + 1 pulse cycle (0 – 90 %)

Line voltage effect: ± 0.1 % over voltage range

Insulation resistance: ≥ 100 M Ω with 500 V DC

Dielectric strength: 2000 V AC @1 minute (input to output to power to ground)

STANDARDS & APPROVALS

CE conformity:

EMC Directive (2004/108/EC)

EN 61000-6-4 (EMI)

EN 61000-6-2 (EMS)

Approval:

UL/C-UL nonincendive Class I, Division 2,

Groups A, B, C, and D hazardous locations

(ANSI/ISA-12.12.01, CAN/CSA-C22.2 No.213)


UL/C-UL general safety requirements

(UL 61010-1, CAN/CSA-C22.2 No.61010-1)




EXTERNAL VIEW

(With the cover open)

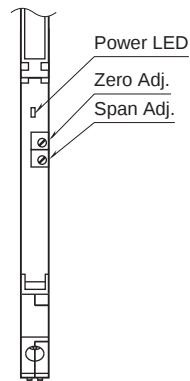


DIMENSIONS unit: mm (inch)

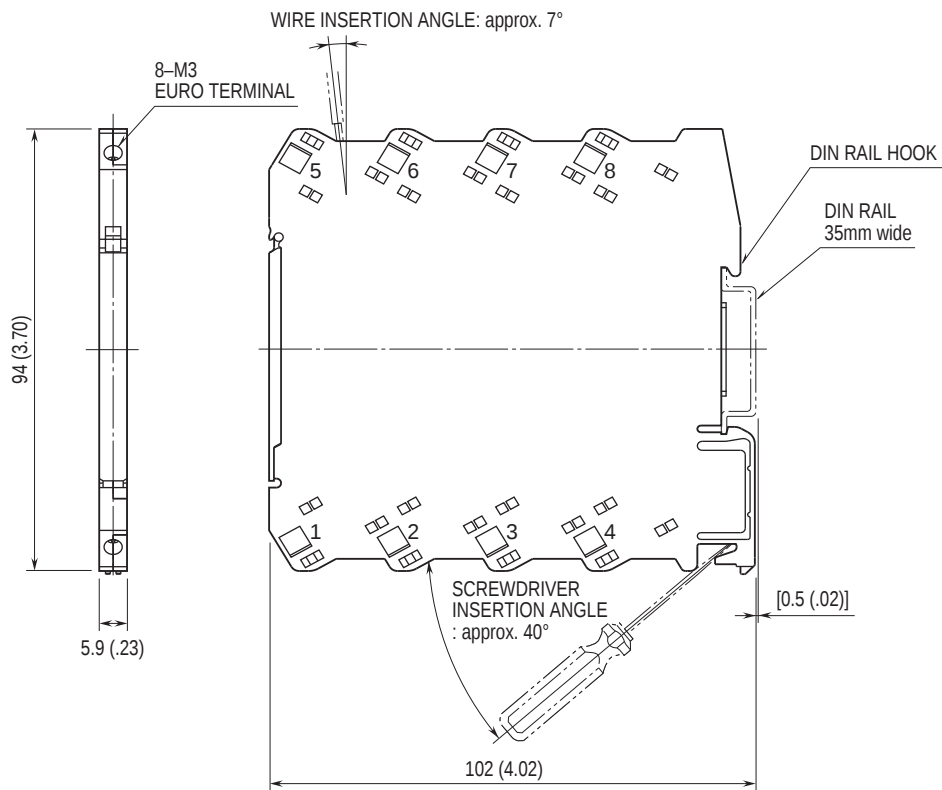


• When mounting, no extra space is needed between units.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

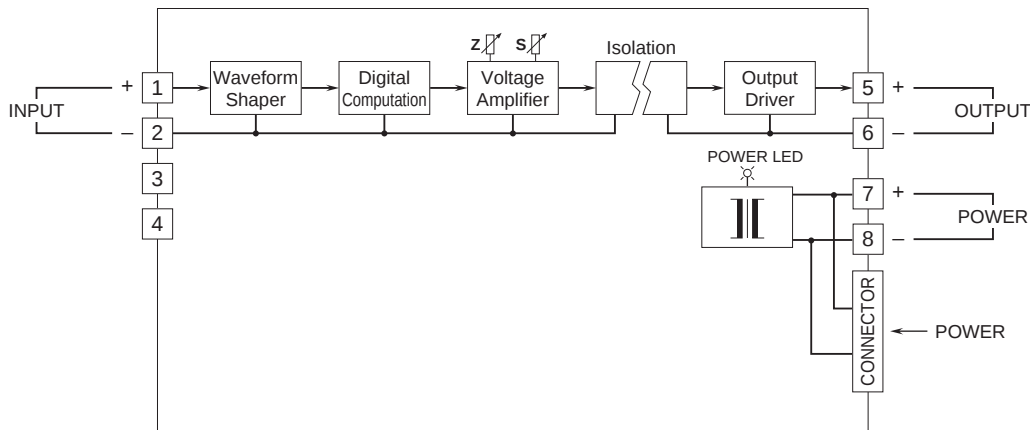

Input Connection Examples

■ Open Collector or Mechanical Contact ■ Voltage Pulse

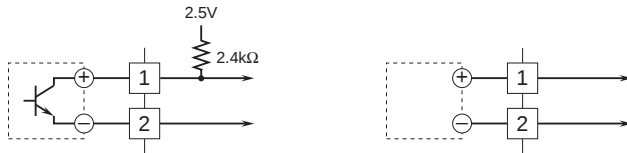

Specifications are subject to change without notice.