MODEL: M6SPS2


#### Tension-Clamp Ultra-Slim Signal Conditioners M6S Series

#### **POWER SUPPLY MODULE**

(dual redundant)

#### **Functions & Features**

- · Maintenance-free tension clamp connection
- Supplies power to the M6S modules mounted on the Installation Base
- · High-density mounting
- Power indicator LED
- UL approval



MODEL: M6SPS2-R[1]

## **ORDERING INFORMATION**

• Code number: M6SPS2-R[1] Specify a code from below for [1]. (e.g. M6SPS2-R/UL)

#### **POWER INPUT**

**DC Power** 

**R**: 24 V DC

(Operational voltage range 22 - 27 V, ripple 10 %p-p max.)

## [1] OPTIONS

**STANDARDS & APPROVALS** 

blank: CE marking

/UL: UL approval (CE marking)

## **GENERAL SPECIFICATIONS**

Connection: Tension clamp

**Applicable wire size**: 0.2 to 2.5 mm<sup>2</sup>, stripped length 8 mm

**Housing material**: Flame-resistant resin (black)

**Power LED**: Green light turns on when the power is supplied.

#### **INSTALLATION**

Power input: 2 A (Total current consumed by signal conditioners on the base must be 2 A or less.)

Operating temperature: -20 to +55°C (-4 to +131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Installation Base (model: M6SBS)

Weight: 60 g (2.1 oz)

#### **PERFORMANCE**

Insulation resistance:  $\geq 100 \text{ M}\Omega$  with 500 V DC

Dielectric strength: 2000 V AC @1 minute (power to ground)

## **STANDARDS & APPROVALS**

#### CE conformity:

EMC Directive (2004/108/EC) EN 61000-6-4 (EMI)

EN 61000-6-2 (EMS)

#### Approval:


UL/C-UL nonincendive Class I, Division 2, Groups A, B, C, and D hazardous locations (ANSI/ISA-12.12.01, CAN/CSA-C22.2 No.213) UL/C-UL general safety requirements (UL 61010-1, CAN/CSA-C22.2 No.61010-1)




MODEL: M6SPS2

## **EXTERNAL VIEW**

(With the cover open)



# **DIMENSIONS** unit: mm (inch)

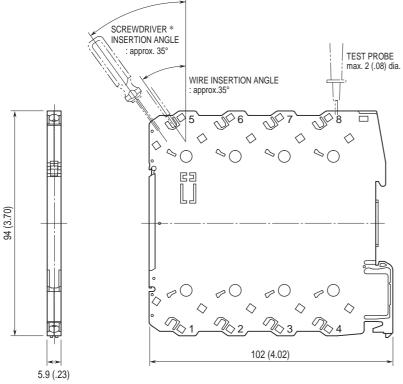


\*Use a minus screwdriver: tip width 3.8 mm max., tip thickness 0.5 to 0.6 mm

幸託有限公司 XIN TOP CORPORATION FAX: (02)2596-2331 Website: www.xintop.com

MODEL: M6SPS2

## **SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

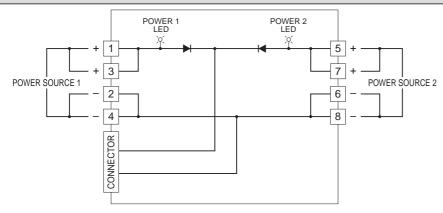

 $\triangle$ 

Specifications are subject to change without notice.

幸託有限公司 TEL: (02)2598-1199 E-mail: info@xintop.com

XIN TOP CORPORATION FAX: (02)2596-2331 Website: www.xintop.com