


Screw Terminal Ultra-Slim Signal Conditioners M6N Series

SIGNAL TRANSMITTER

Functions & Features

- 7.5-mm wide ultra-slim design
- Low profile allows the M6N module mounted in a 120-mm deep panel
- Galvanically isolates process instrumentation signals
- High-density mounting
- Power indicator LED
- UL approval

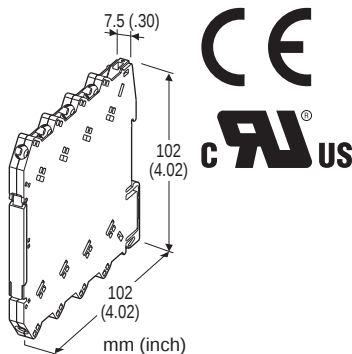

MODEL: M6NVS-[1][2]-[3][4]

ORDERING INFORMATION

- Code number: M6NVS-[1][2]-[3][4]
Specify a code from below for each [1] through [4].
(e.g. M6NVS-4W4W-R/K/UL)
- Special input and output ranges (For codes Z & 0)

[1] INPUT

Current

- A: 4 – 20 mA DC (Input resistance 50 Ω)
- B: 2 – 10 mA DC (Input resistance 100 Ω)
- C: 1 – 5 mA DC (Input resistance 200 Ω)
- D: 0 – 20 mA DC (Input resistance 50 Ω)
- E: 0 – 16 mA DC (Input resistance 50 Ω)
- F: 0 – 10 mA DC (Input resistance 100 Ω)
- G: 0 – 1 mA DC (Input resistance 1000 Ω)
- H: 10 – 50 mA DC (Input resistance 20 Ω)
- Z: Specify current (See INPUT SPECIFICATIONS)

Voltage

- 3: 0 – 1 V DC (Input resistance 1 M Ω min.)
- 4: 0 – 10 V DC (Input resistance 1 M Ω min.)
- 5: 0 – 5 V DC (Input resistance 1 M Ω min.)
- 6: 1 – 5 V DC (Input resistance 1 M Ω min.)
- 4W: -10 – +10 V DC (Input resistance 1 M Ω min.)
- 5W: -5 – +5 V DC (Input resistance 1 M Ω min.)

0: Specify voltage (See INPUT SPECIFICATIONS)

[2] OUTPUT

Current

- A: 4 – 20 mA DC (Load resistance 550 Ω max.)
- D: 0 – 20 mA DC (Load resistance 550 Ω max.)
- G: 0 – 1 mA DC (Load resistance 11 k Ω max.)
- Z: Specify current (See OUTPUT SPECIFICATIONS)

Voltage

- 3: 0 – 1 V DC (Load resistance 1000 Ω min.)
- 4: 0 – 10 V DC (Load resistance 10 k Ω min.)
- 5: 0 – 5 V DC (Load resistance 5000 Ω min.)
- 6: 1 – 5 V DC (Load resistance 5000 Ω min.)
- 4W: -10 – +10 V DC (Load resistance 20 k Ω min.)
- 5W: -5 – +5 V DC (Load resistance 10 k Ω min.)
- 0: Specify voltage (See OUTPUT SPECIFICATIONS)

[3] POWER INPUT

AC Power

- M2: 100 – 240 V AC (Operational voltage range 90 – 264 V, 47 – 66 Hz)
- (UL not available)

DC Power

- R: 24 V DC
- (Operational voltage range 24 V $\pm$ 10 %, ripple 10 %p-p max.)

[4] OPTIONS (multiple selections)

RESPONSE TIME (0 – 90 %)

- blank: Standard ($\leq$ 0.5 sec.)
- /K: Fast Response (Approx. 3.5 msec. voltage output; Approx. 25 msec. current output)

STANDARDS & APPROVALS

- blank: CE marking
- /UL: UL approval (CE marking)

GENERAL SPECIFICATIONS


Connection

- Input and output:** M3 screw terminal (torque 0.5 N·m)
- Power input:** Via the Installation Base (model: M6NBS) (not available for AC power input)
or M3 screw terminal (torque 0.5 N·m)
- Recommended solderless terminal:** Max. 5.8 mm (0.23") wide; Ones with insulation sleeve do not fit.
- Applicable wire size 0.2 – 2.5 mm²
- Housing material:** Flame-resistant resin (black)
- Isolation:** Input to output to power
- Zero adjustment:** -2 to +2% (front)
(Output code 4W, 5W: Adjustable at 0V. No output below 0mA for the code D.)
- Span adjustment:** 98 to 102 % (front)



Power LED: Green light turns on when the power is supplied.

■Recommended solderless terminal



INPUT SPECIFICATIONS

- **DC Current:** Input resistor incorporated
Specify input resistance value for code Z.
($R \leq 0.125 \text{ W} \div [\text{F.S. Current}]^2$)

- **DC Voltage:** -30 – +30 V DC

Minimum span: 100 mV

Offset: Max. 1.5 times span

Input resistance: 1 M Ω min. (10 k Ω min. with no power supplied)

OUTPUT SPECIFICATIONS

- **DC Current:** 0 – 20 mA DC

Minimum span: 1 mA

Offset: Max. 1.5 times span

Load resistance: Output drive 11 V max.

- **DC Voltage:** 0 – 10 V DC

Minimum span: 1 V

Offset: Max. 1.5 times span

Load resistance: Output drive 1 mA max.; at $\geq 1 \text{ V}$

INSTALLATION

Power Consumption

- **AC Power input:** Max. 2 VA

- **DC Power input:** Approx. 0.5 W

Operating temperature: -20 to +55°C (-4 to +131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Installation Base (model: M6NBS) or DIN rail

Weight: 60 g (2.1 oz)

PERFORMANCE in percentage of span

Accuracy: $\pm 0.1 \%$

Temp. coefficient: $\pm 0.01 \%/^{\circ}\text{C}$ ($\pm 0.006 \%/^{\circ}\text{F}$)

Line voltage effect: $\pm 0.1 \%$ over voltage range

Insulation resistance: $\geq 100 \text{ M}\Omega$ with 500 V DC

Dielectric strength: 2000 V AC @1 minute (input to output to power to ground)

STANDARDS & APPROVALS

CE conformity:

EMC Directive (2004/108/EC)

EN 61000-6-4 (EMI)

EN 61000-6-2 (EMS)

Low Voltage Directive (2006/95/EC)

EN 61010-1

Installation Category II

Pollution Degree 2

Max. operating voltage 300 V

Input or output to power: Reinforced insulation

Input to output: Basic insulation

Approval:

UL/C-UL nonincendive Class I, Division 2,

Groups A, B, C, and D hazardous locations

(ANSI/ISA-12.12.01, CAN/CSA-C22.2 No.213)

UL/C-UL general safety requirements

(UL 61010-1, CAN/CSA-C22.2 No.61010-1)



幸託有限公司
XIN TOP CORPORATION

TEL : (02)2598-1199


FAX : (02)2596-2331

E-mail : info@xintop.com


Website : www.xintop.com

EXTERNAL VIEW

(With the cover open)

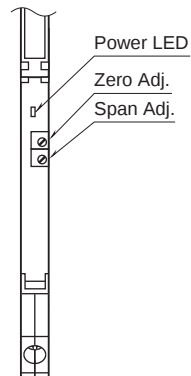


DIMENSIONS unit: mm (inch)

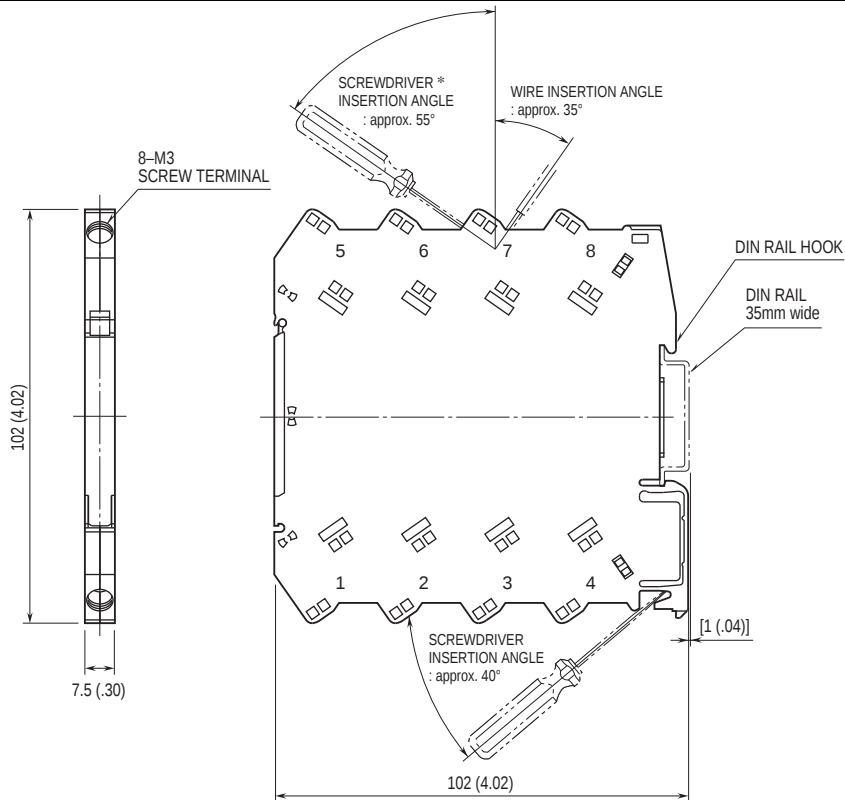

*Screwdriver stem diameter: 6 mm (.24") or less

• When mounting, no extra space is needed between units.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

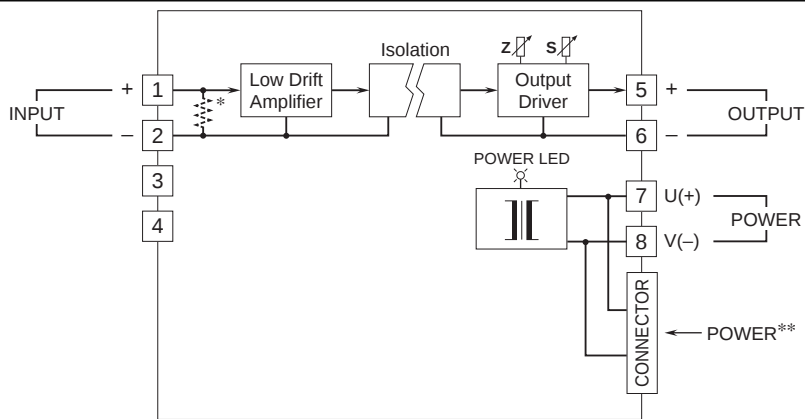

*Input shunt resistor incorporated for current input.

**Available only for DC power input type



Specifications are subject to change without notice.