

TMCHallcrest

Surface Temperature Monitoring System

THERMAX®

Irreversible Temperature Sensitive Products



IRREVERSIBLE LABELS

A fast, simple temperature monitoring system based on Proprietary colour change technology


- ◆ Inexpensive and Easy to Use
- ◆ Immediate Response
- ◆ Permanent Record of Highest Temperature
- ◆ Oil, Water and Steam Resistant
- ◆ Accuracy Tolerances
 - 29°C to 99°C is +/-1°C
 - 100 to 154°C is +/-1.5°C
 - 160°C to 280°C +/- (1%+1°C)
- ◆ Temperature range 29-290°C
- ◆ Labels or Strips
- ◆ Silver to Black Colour Change
- ◆ Last Black Event is the highest temperature achieved

THERMAX 10 LEVEL STRIPS

A	°C	40	42	44	46	49	54	60	62	65	71
	°F	104	108	111	115	120	129	140	144	149	160
B	°C	77	82	88	93	99	104	110	116	121	127
	°F	171	180	190	199	210	219	230	241	250	261
C	°C	132	138	143	149	154	160	166	171	177	182
	°F	270	280	289	300	309	320	331	340	351	360
D	°C	188	193	199	204	210	216	224	232	241	249
	°F	370	379	390	399	410	421	435	450	466	480

Specifications:

Size: 51 x 18mm (2.00" x 0.7")
 Type: Vertical, Self adhesive.
 Scale: °C and °F
 Range: (Sold in units of 10)

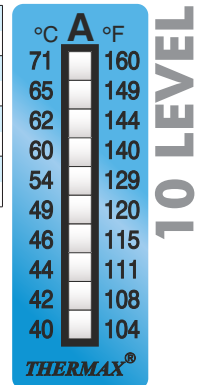


THERMAX 8 LEVEL STRIPS

A	°C	37	40	43	46	49	54	60	65	
	°F	99	104	109	115	120	129	140	149	
B	°C	71	77	82	88	93	99	104	110	
	°F	160	171	180	190	199	210	219	230	
C	°C	116	121	127	132	138	143	149	154	
	°F	241	250	261	270	280	289	300	309	
D	°C	160	166	171	177	182	188	193	199	
	°F	320	331	340	351	360	370	379	390	
E	°C	204	210	216	224	232	241	249	254	260
	°F	399	410	421	435	450	466	480	489	500

Specifications:

Size: 51 x 18mm (2.00" x 0.7")
 Type: Vertical, Self adhesive.
 Scale: °C and °F
 Range: (Sold in units of 10)

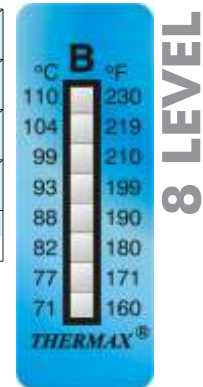

THERMAX 6 LEVEL MINI STRIPS

1	°C	29	33	34	37	40	42
	°F	84	91	93	99	104	108
2	°C	44	46	49	54	60	62
	°F	111	115	120	129	140	144
3	°C	65	71	77	82	88	93
	°F	149	160	171	180	190	199
4	°C	99	104	110	116	121	127
	°F	210	219	230	241	250	261
5	°C	132	138	143	149	154	160
	°F	270	280	289	300	309	320
6	°C	166	171	177	182	188	193
	°F	331	340	351	360	370	379
7	°C	199	204	210	216	224	232
	°F	390	399	410	421	435	450
8	°C	241	249	254	260	280	290
	°F	466	480	489	500	536	554

Specifications:

Size: 12 x 32mm (0.47" x 1.26")
 Type: Horizontal, Self adhesive.
 Scale: °C and °F
 Range: (Sold in units of 10)



6 LEVEL


THERMAX 5 LEVEL STRIPS

A	°C	37	40	*43	*46	*49
	°F	99	104	109	115	120
B	°C	49	54	60	65	71
	°F	120	129	140	149	160
C	°C	77	82	88	93	99
	°F	171	180	190	199	210
D	°C	104	110	116	121	127
	°F	219	230	241	250	261
E	°C	132	138	143	149	154
	°F	270	280	289	300	309
F	°C	160	166	171	177	182
	°F	320	331	340	351	360
G	°C	188	193	199	204	210
	°F	370	379	390	399	410
H	°C	216	224	232	241	249
	°F	421	435	450	466	480
I	°C	249	254	260	280	290
	°F	480	489	500	536	554
S	°C	29	33	34	37	40
	°F	84	91	93	99	104

Specifications:

Size: 39 x 18mm (1.53" x 0.7")
 Type: Vertical, Self adhesive.
 Scale: °C and °F
 Range: (Sold in units of 10)

(*Please note that the temps on the 5A may be subject to change due to ongoing development)



5 LEVEL



幸託有限公司
 XIN TOP CORPORATION

TEL : (02)2598-1199
 FAX : (02)2596-2331

E-mail : info@xintop.com
 Website : www.xintop.com

TMCHallcrest

Surface Temperature Monitoring System

THERMAX®

Strips and Indicators

APPLICATIONS

Pharmaceuticals and Food Stuffs

- ◆ **Prevention of heat-related deterioration**

During Transportation and Distribution

Prove that a thermal disinfection temperature has been reached

Manufacturing—

Electronics, Aerospace, Automotive

- ◆ **Monitoring temperature surface (curing-bonding)**

Confirm that soldering temperatures have been achieved

- ◆ **Observing machinery overheating due to friction**

Warranty abuse monitor engine component temperature

Confirm temperature integrity in machine maintenance

- ◆ **Insure that temperature sensitive products meet installation requirements**

Warn users that environmental conditions exceed temperature limits

Complies with the essential requirements of the relevant European health, safety and environmental protection legislation

Specifications:

Size: 12 x 13mm (0.47" x 0.51")
 Type: Single temperature indicator shows when maximum temperature has been achieved. Self adhesive.
 Scale: °C and °F
 Range: (Sold in units of 50)



THERMAX ENCAPSULATED INDICATORS

°C	29	33	34	37	40	42	43
	44	46	49	54	60	62	65
	71	77	82	88	93	99	104
	110	116	121	127	132	138	143
	149	154	160	166	171	177	182
	188	193	199	204	210	216	224
	232	241	249	254	260	280	290

°F	84	91	93	99	104	108	109
	111	115	120	129	140	144	149
	160	171	180	190	199	210	219
	230	241	250	261	270	280	289
	300	309	320	331	340	351	360
	370	379	390	399	410	421	435
	450	466	480	489	500	536	554


ENCAPSULATED

THERMAX 4 LEVEL STRIPS

A	°C	37	44	49	54	F	°C	149	154	160	166
	°F	99	111	120	129		°F	300	309	320	331
B	°C	60	65	71	77	G	°C	171	177	182	188
	°F	140	149	160	171		°F	340	351	360	370
C	°C	82	88	93	99	H	°C	193	199	204	210
	°F	180	190	199	210		°F	379	390	399	410
D	°C	104	110	116	121	I	°C	216	224	232	241
	°F	219	230	241	250		°F	421	435	450	466
E	°C	127	132	138	143	J	°C	249	260	280	290
	°F	261	270	280	289		°F	480	500	536	554

Specifications:

Size: 23 x 45mm (0.91" x 1.77")
 Type: Horizontal, Self adhesive.
 Scale: °C and °F
 Range: (Sold in units of 10)



4 LEVEL

THERMAX 4 LEVEL MICRO LABELS

1	°C	40	42	44	46	
	°F	105	110	115	120	
2	°C	49	54	60	65	
	°F	120	130	140	150	
3	°C	71	77	82	88	
	°F	160	170	180	190	
4	°C	93	99	104	110	
	°F	200	210	220	230	
5	°C	116	121	127	132	
	°F	240	250	260	270	
6	°C	138	143	149	154	
	°F	280	290	300	310	
7	°C	160	166	171	177	
	°F	320	330	340	350	
8	°C	182	188	193	199	
	°F	360	370	380	390	
9	°C	204	210	215	224	
	°F	400	410	420	435	

4 LEVEL MICRO

Specifications:

Size: 4 x 11mm (0.15" x 0.43")
 Type: Horizontal, Self adhesive.
 Scale: °C
 Range: (Sold in units of 10)

THERMAX CLOCK INDICATORS

1	°C	40	43	46	49	54	
	°F	105	110	115	120	130	
2	°C	60	65	71	77	82	
	°F	140	150	160	170	180	
3	°C	88	93	99	104	110	
	°F	190	200	210	220	230	
4	°C	116	121	127	132	138	
	°F	240	250	260	270	280	
5	°C	143	149	154	160	166	
	°F	290	300	310	320	330	
6	°C	171	177	182	188	193	
	°F	340	350	360	370	380	
7	°C	199	204	210	216	224	
	°F	390	400	410	420	435	
8	°C	232	241	249	254	260	
	°F	450	465	480	490	500	

Specifications:

Size: 15mm Diameter (0.59")
 Type: Circular, Self adhesive.
 Scale: °C and °F
 Range: (Sold in units of 10)



CLOCK



幸託有限公司
 XIN TOP CORPORATION

TEL : (02)2598-1199
 FAX : (02)2596-2331

E-mail : info@xintop.com
 Website : www.xintop.com